

“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company



## Heyco® Thin Panel Dome Plugs

Multiple Locking Steps for Panels as Thin as .020" (0,5 mm)  
 Mounting Hole Diameter Range: .218" (5,5 mm) to .875" (22,2 mm)\*

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Thickness at Locking		Mounting Hole Diameter*		Black	White		A		B	
Finger Steps		in.	mm.				in.	mm.	in.	mm.

Three Steps to .048" (1,2 mm) thick

.020 .032 .048	0,5 0,8 1,2	.218	5,5	<b>1654N</b>	<b>1655N</b>	SP 218N	.28	7,1	.25	6,4
		.250	6,4	<b>2607N</b>	<b>2608N</b>	SP 250N	.31	7,9		
		.281	7,1	<b>1660N</b>	<b>1661N</b>	SP 281N	.34	8,7		
		.312	7,9	<b>1678N</b>	<b>1679N</b>	SP 312N	.38	9,5		
		.343	8,7	<b>1663N</b>	<b>1664N</b>	SP 343N	.41	10,3		
		.375	9,5	<b>1681N</b>	<b>1682N</b>	SP 375N	.47	11,9		

Five Steps to .064" (1,6 mm) thick


.020 .032 .040 .048 .064	0,5 0,8 1,0 1,2 1,6	.500	12,7	<b>1687N</b>	<b>1688N</b>	SP 500N	.56	14,3	.25	6,4
		.512	13,0	<b>1716N</b>	<b>1717N</b>	SP 512N				
		.625	15,9	<b>1690N</b>	<b>1691N</b>	SP 625N				
		.750	19,1	<b>1693N</b>	<b>1694N</b>	SP 750N				
		.875	22,2	<b>1699N</b>	<b>1700N</b>	SP 875N				

Standard color black. Consult Heyco for other colors.

\*Consult Heyco for other Mounting Hole Diameters. Our Axcell Rapid Response Team is ready to meet your requirements.

- Provide a flush, finished fit in panels as thin as .020" (0,5 mm).
- Quick and easy installation.
- Multiple sizes for mounting holes from .218" (5,5 mm) to .875" (22,2 mm).
- Consult Heyco for other Thin Panel Mounting Hole Diameters.
- Lock firmly in panels up to .064" (1,6 mm) thick.

**NEW!**

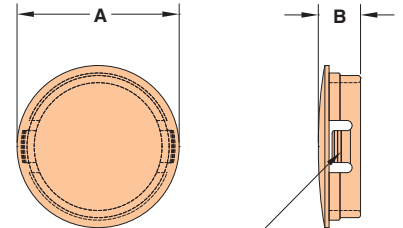

MULTIPLE FINGER STEPS FOR TIGHT PANEL FIT

## Heyco® Thin Panel versus Shorty Plugs

Choose from Multiple Locking Steps, for the Fit and Finish Your Application Requires

Mounting Hole Diameter	PANEL DIMENSIONS						PART NO.		DESCRIPTION
	Maximum Thickness Locking Steps						Black	White	
	in.	mm.	.020 0,5	.032 0,8	.040 1,0	.048 1,2			
.218	5,5	x	x		x		<b>1654N</b>	<b>1655N</b>	SP 218N
							x	<b>1654</b>	<b>1655</b>
.250	6,4	x	x		x		<b>2607N</b>	<b>2608N</b>	SP 250N
				x	x		x	<b>1660N</b>	<b>1661N</b>
.281	7,1						<b>1660</b>	<b>1661</b>	SP 281
		x	x		x		x	<b>1678N</b>	<b>1679N</b>
.312	7,9						<b>1678</b>	<b>1679</b>	SP 312
		x	x		x		x	<b>1663N</b>	<b>1664N</b>
.343	8,7						<b>1663</b>	<b>1664</b>	SP 343
		x	x		x		x	<b>1681N</b>	<b>1682N</b>
.375	9,5						<b>1681</b>	<b>1682</b>	SP 375
		x	x	x	x	x	<b>1687N</b>	<b>1688N</b>	SP 500N
.500	12,7						<b>1687</b>	<b>1688</b>	SP 500
		x	x	x	x	x	<b>1690N</b>	<b>1691N</b>	SP 625N
.625	12,7						<b>1690</b>	<b>1691</b>	SP 625
		x	x	x	x	x	<b>1693N</b>	<b>1694N</b>	SP 750N
.750	19,1						<b>1693</b>	<b>1694</b>	SP 750
		x	x	x	x	x	<b>1699N</b>	<b>1700N</b>	SP 875N
.875	22,2						<b>1699</b>	<b>1700</b>	SP 875

Material Certifications



Nylon 6/6  
 Recognized under the Component Program of Underwriters' Laboratories, File E51579



Certified by Canadian Standards Association, File 8919

Flammability Rating  
 Temperature Range

94V-2  
 -40°F (-40°C) to 221°F (105°C)

Quick Specs