


“Stay Connected” with



Solar Power Components

a PennEngineering® Company



## Heyco® Nytye® Mounting Platforms


### Snap Over Bolt Platforms

- Multiple sizes, strengths, and mounting options anchor Nytyes® securely.
- Five Types:
  - 1) Flat - Adhesive-Back and Screw Mounts
  - 2) Saddle - Screw Mount only
  - 3) Push Mount - Arrowhead and Blind Mounts
  - 4) Snap Over Bolt
  - 5) Stainless Steel Clip
- Rubber based adhesive effective up to 126°F (52°C).
- Apply Adhesive-Backed parts to a clean, dry surface.



	MAX. TENSILE STRENGTH		INSERT POINTS	BOLT SIZE		PART NO.	DESCRIPTION	PART DIMENSIONS							
	Lbs.	N		in.	mm.			A		B		C			
<b>NEW!</b>	50	222	2	#10	5,0	<b>3706</b>	MP S-M5*	.96	24,4	.60	15,2	.32	8,1		
<b>NEW!</b>				1/4	6,0									<b>3707</b>	MP S-M6
	120	534	2	1/2	12,0	<b>3710</b>	MP S-1/2	2.31	58,7	1.25	31,8	1.05	26,7		
				9/16	14,0									<b>3711</b>	MP S-9/16
				5/8	16,0										

Standard color black.


\*3706 will also work with the PEM X-Press 5 mm stud



3710-3754



3706-3707




### Stainless Steel Edge Clip Platforms


**ALL NEW PRODUCTS**

MAX. CABLE TIE WIDTH*	PANEL THICKNESS RANGE				INSERT POINTS	PART NO.	DESCRIPTION	PART DIMENSIONS					
	in.	mm.	Minimum in.	Maximum mm.				A		B		C	
.31	8,0	.06	1,5	.12	3,0	4	<b>S6474</b>	1.03	26,2	.63	16,0	.77	19,5
		.12	3,0	.25	6,4	4	<b>S6475</b>						

\*Edge Clip Platforms SunRunner CT and CT-EZ fit all Heyco Stainless Steel Cable Ties, see page 7-69

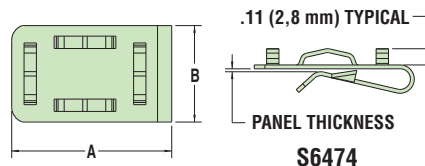

S6474



S6475

Quick Specs

Material Nylon 6/6 (Snap Over Bolts)  
 .025" Thick 304 stainless steel (CT & CT-EZ)

Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523 (CT & CT-EZ)