

“Stay Connected” with



HEYware Products


a PennEngineering® Company



## Heyco® Nytye® Heavy Duty and Extra Heavy Duty/HVAC Nylon Cable Ties

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Bundle Diameter		Natural	UV Black		A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	
<b>Heavy Duty</b>										
120	534	1.30	33,0	<b>13172</b>	<b>13172B</b>	NT-120-059	5.91	150	.30	7,6
		1.97	50,0	<b>13175</b>	<b>13175B</b>	NT-120-078	7.87	200		
		2.48	63,0	<b>13178</b>	<b>13178B</b>	NT-120-098	9.84	250		
		3.23	82,0	<b>13181</b>	<b>13181B</b>	NT-120-118	11.81	300		
		3.54	90,0	<b>13183</b>	<b>13183B</b>	NT-120-137	13.78	350		
		3.98	101,0	<b>13185</b>	<b>13185B</b>	NT-120-149	14.96	380		
		4.13	105,0	<b>13186</b>	<b>13186B</b>	NT-120-157	15.75	400		
6.10	155,0	<b>13190</b>	<b>13190B</b>	NT-120-216	21.65	550				
<b>Extra Heavy Duty/HVAC</b>										
175	778	7.48	190,0	<b>13208</b>	<b>13208B</b>	NT-175-256	25.59	650	.35	9,0
		9.65	245,0	<b>13215</b>	<b>13215B</b>	NT-175-315	31.50	800		
		10.67	271,0	<b>13217</b>	<b>13217B</b>	NT-175-362	36.22	920		
		11.42	290,0	<b>13218</b>	<b>13218B</b>	NT-175-394	39.37	1000		
		14.49	368,0	<b>13220</b>	<b>13220B</b>	NT-175-482	48.23	1225		

Standard colors natural and UV Black. Consult Heyco for heat-stabilized material and colors.




- Smooth, radiused edges ensure that Nytyes won't cut into the cable's insulation—or the installer's hand.
- One-piece design reduces cost and installation time.
- Nytyes feature a bent tip for ease of pickup and insertion around small bundles. V-shaped raised ridges on the tip provide a sure grip.
- Close, evenly spaced teeth permit fine adjustment—from .025" (0,6 mm) on the smallest Nytyes to .063" (1,6 mm) on the largest.
- Compliant with MS3367 and MIL-S-23190E




## Heyco® Nytye® Double Loop Cable Ties

PART SPECIFICATIONS				PART NO.	DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Combined Bundle Diameter F				Natural	A Length		B Width
Lbs.	N	in.	mm.		in.	mm.	in.	mm.	
50	222	1.77	45,0	<b>13320</b>	NTDL-050-076	7.68	195	.19	4,8
		2.05	52,0	<b>13321</b>	NTDL-050-088	8.86	225		
		2.99	76,0	<b>13323</b>	NTDL-050-118	11.81	300		
		3.86	98,0	<b>13324</b>	NTDL-050-145	14.56	370		

Standard color natural.

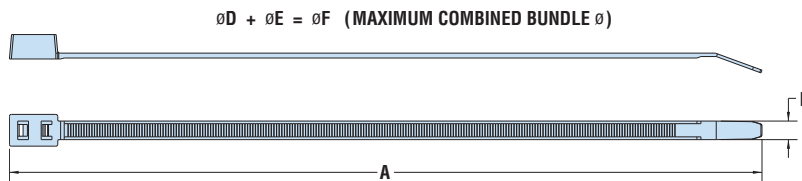

- Cost-effective way to secure and separate two bundles with one cable tie
- Quickly and easily pulls through increasing productivity
- Single part covers multiple bundle sizes resulting in reduced part number inventory



Material  
Certifications

Nylon 6/6  
Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523 (NT parts only)

Flammability Rating  
Temperature Range

94V-2  
-40°F (-40°C) to 185°F (85°C)

Quick Specs